


AIPHONE


JO series

MANOS-LIBRES
VIDEO INTERCOM
7-INCH TOUCH SCREEN

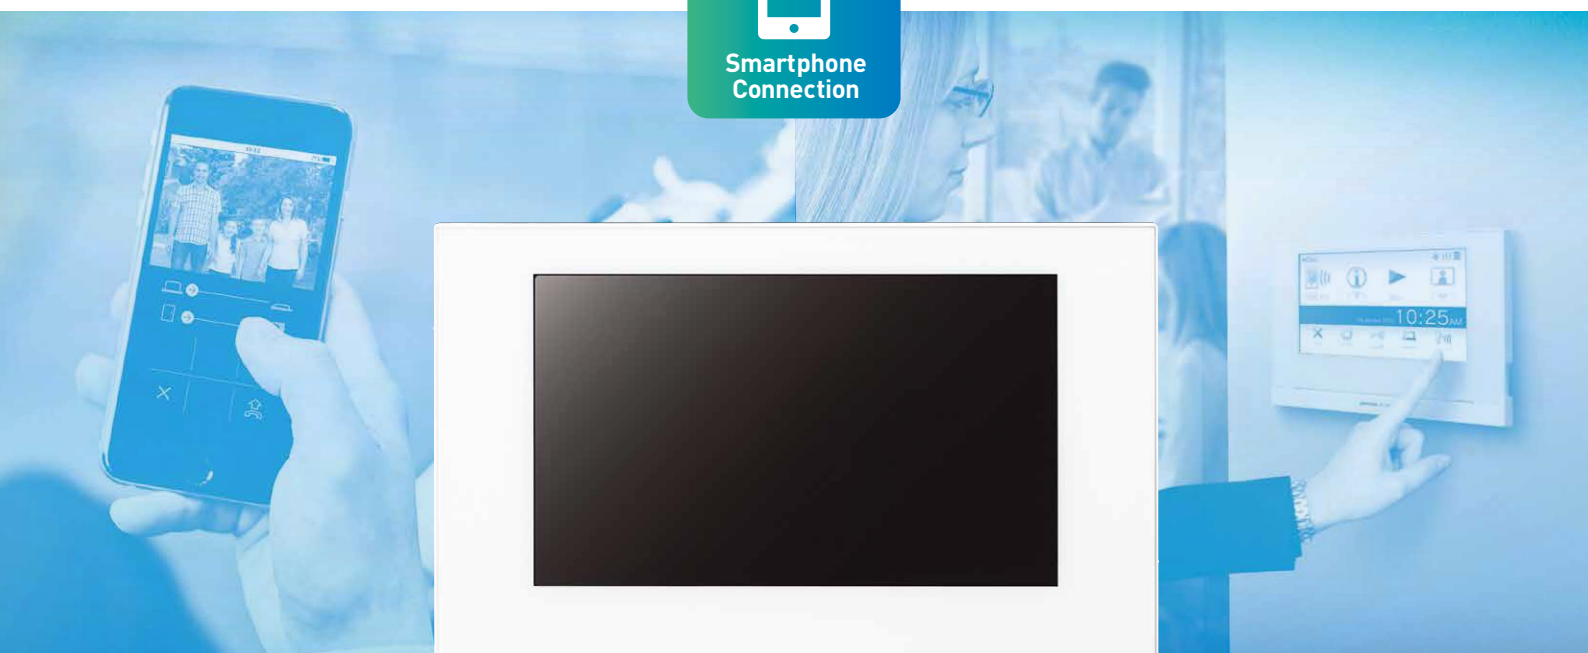

J0 Series: conectividad a smartphone

Mayor comodidad y seguridad para

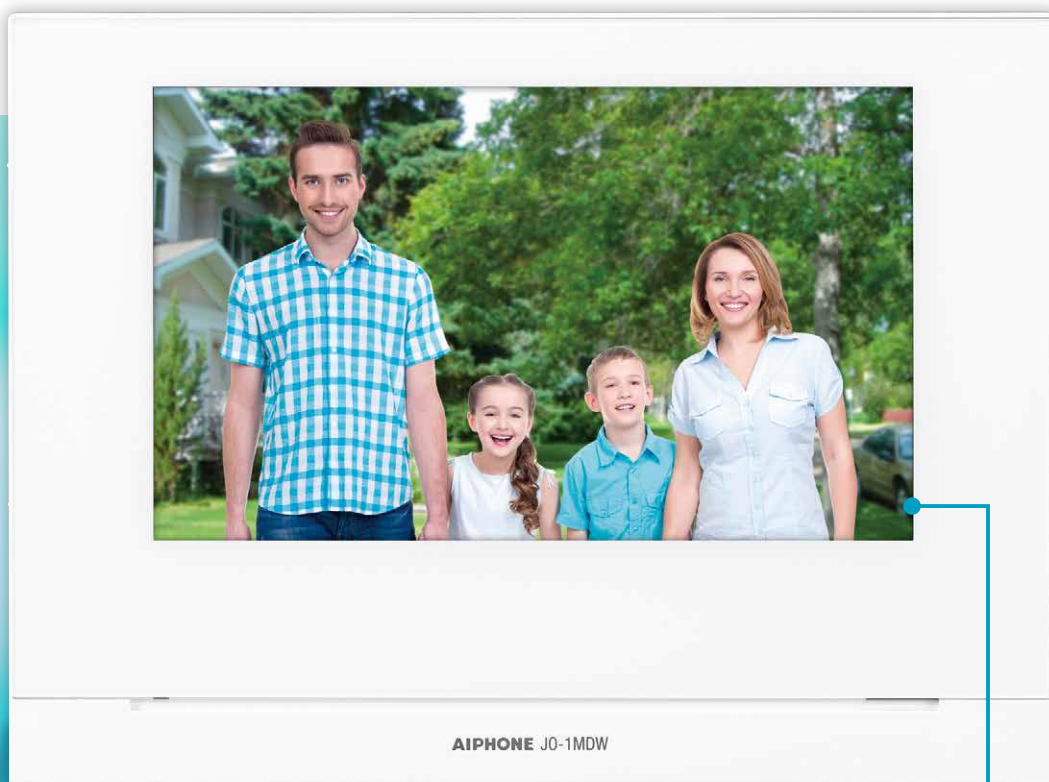

J0-1MDW

- Operacion con 7-pulg pantalla tactil
- Comunicacion manos-libres Total
- Zoom y pantalla panoramica

7inch touch
LCD screen

Grabacion Video


Grabe a los visitantes aun sin contestar las llamadas. Vea las grabaciones desde la estacion maestra o desde su smartphone.

Video memory

- Memoria Interna : 10 calls(max)
- SD card : 1,000 calls(max)



View recorded calls anywhere

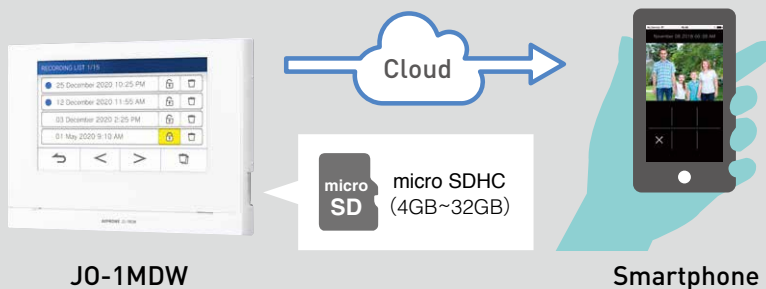

* incluimos SD 32GB

su hogar y oficina.



Operacion de pantalla tactil

- Smartphone**
Control cuando las llamadas son desviadas al mobil.
- Notificaciones**
Confirma actualizaciones del sistema y otras notificaciones importantes.
- Reproducir**
Reproduce y administra las grabaciones.
- Monitoree**
Vigila tu puerta.

- Configuraciones**
Configuracion del sistema.
- Apertura de puerta**
Apertura de cerradura electrica conectada a la estacion master.
- Control Opcional**
Control de dispositivo externo conectado a la estacion master.
- Talk**
Comunicacion con la estacion puerta.

Opciones de placas

Seleccione entre 3 diferentes estilos. **Todas** las opciones son aptas para condiciones climaticas adversas.

 JO-DA	IP54 ... Resistente al polvo - humedad LED Nocturno	 JO-DV	IP54 ... Resistente a la humedad - polvo IK08 ... Resistente contra vandalismo ZINC ... ZINC material LED Nocturno	 JO-DVF	IP54 ... Resistente a la humedad - polvo IK07 ... Resistente contra vandalismo ACERO INOXIDABLE LED Nocturno
---	--	---	---	--	---

Smartphone App proporciona conectividad en todas partes.



Tenga la funcionalidad de la estacion maestra en su bolsillo

- Conteste las llamadas del portero.
- Monitoree la estacion de portero.
- Abra la cerradura electrica mientras contesta la llamada.
- Controle algun dispositivo externo mientras contesta la llamada.
- Combine entre mode altavoz y modo telephone si es necesario.
- Zoom in/zoom out: funciones de acercamiento o alejamiento.

Conecte su smartphone en 3 simples pasos:




Ejemplo de Uso

Conteste las llamadas donde sea.. dentro o fuera de su casa ..u oficina



Controle sus entregas cuando no esta en casa .. o en oficina

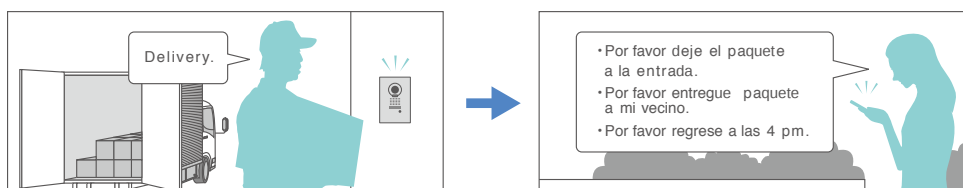

Abra su puerta desde donde sea...




Notas

- Conecte JO-1MDW (estacion master) a un router Wi-Fi disponible, y éste deber estar conectado al Internet.
- Asegurese de que la estacion master se instale cerca al router Wi-Fi y que la conexon inalambrica no este obstaculizada.
- Asegurese que la conexon a internet para la estacion master y su dispositivo mobil cumplan el requisito minimo para esta aplicacion (1.3MBs for download and 1.3MBs for upload).

- La aplicacion no deberia ser usada para llamadas y comunicacion.
- Las tarifas de internet y tarifas de uso de datos son de responsabilidad del usuario.
- Se pueden registrar hasta 8 dispositivos mobiles en una estacion mastra.


Instalacion Sencilla

Conecte todas las unidades del sistema con solo 2 cables.

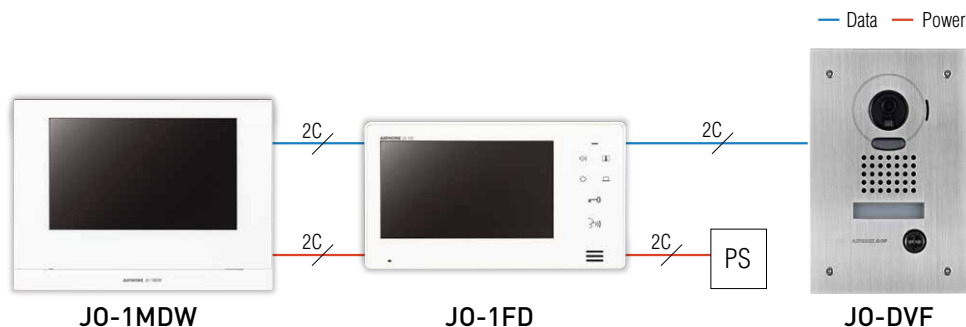


Actualizaciones Automaticas

Actualizaciones automaticas aseguran que ud. siempre disponga de la ultima funcionalidad y seguridad.

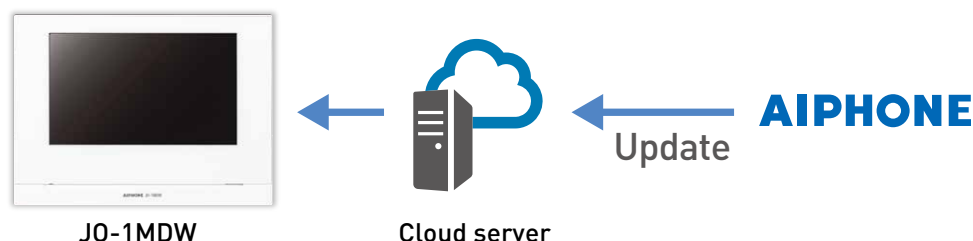


Compatibilidad con la serie existente JO .

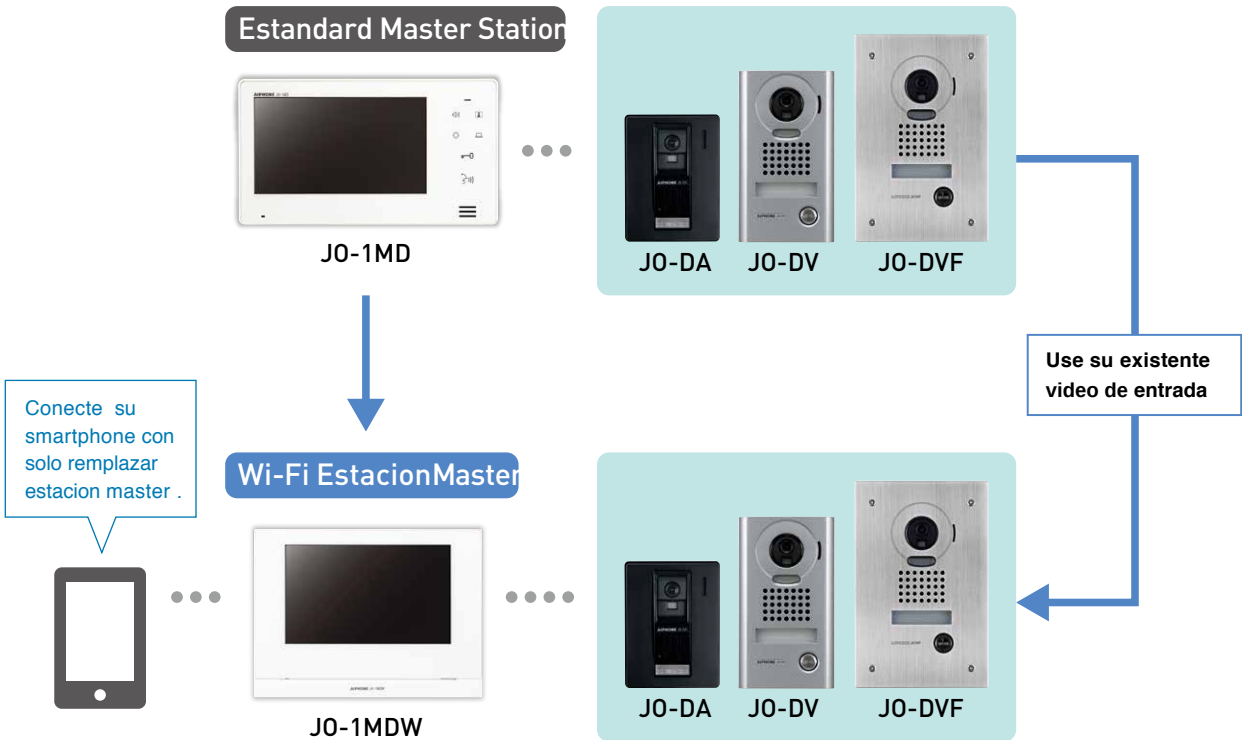


Configuracion

• Instalacion con una Estacion Interna

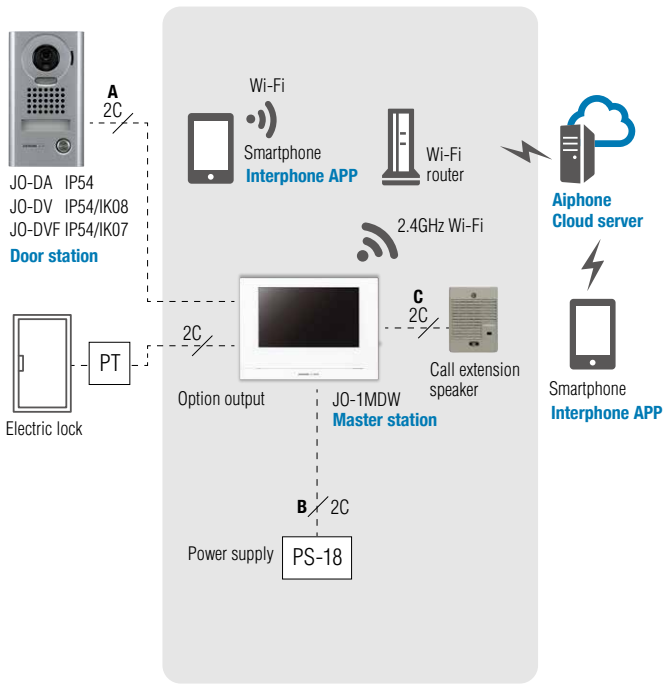

• Instalacion com dos Estaciones Internas

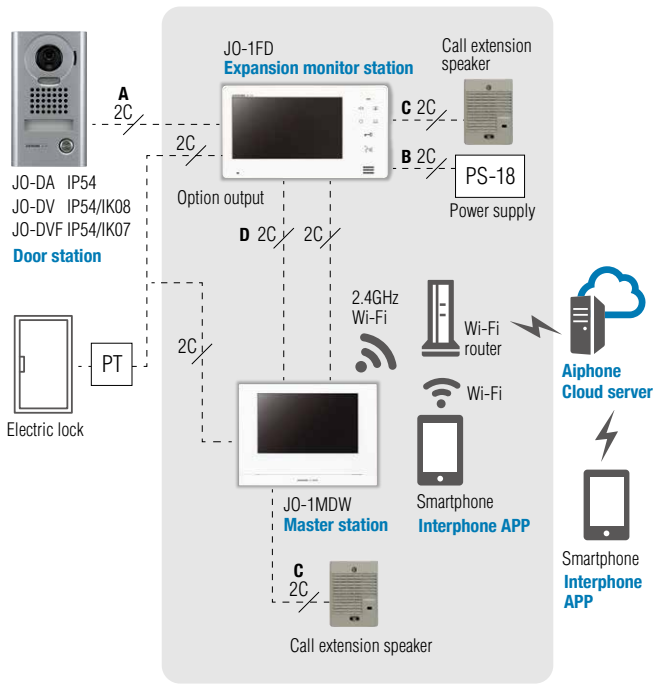

	φ 0.65mm	22 AWG	φ 0.8-1.2mm	20-16 AWG
A	50m	165'	100m	330'
B	5m	16'	10m	33'
C	50m	165'	150m	490'
D	50m	165'	100m	330'

PS18:PS-1820,PS-1820S,PS-1820UL,PS-1820BF

Wi-Fi Master Station

Master station



JO-1MDW

Boxed sets



JOS-1AW: JO-1MDW, JO-DA
JOS-1VW: JO-1MDW, JO-DV
JOS-1FW: JO-1MDW, JO-DVF

Estandard Master Station

Master station



JO-1MD

Boxed sets



JOS-1A: JO-1MD, JO-DA
JOS-1V: JO-1MD, JO-DV
JOS-1F: JO-1MD, JO-DVF

Door station



JO-DA



JO-DV



JO-DVF

Expansion monitor station



JO-1FD

Specifications

JO-1MDW

Power source	18V DC, Supplied from a power supply
Current consumption	450mA(max.) 80mA(standby.)
Video monitor	7" TFT LCD touch screen
Resolution	800×480 (approx.384,000 pixels)
Type of communication	Open voice hands-free auto-voice actuation or Touch-to-talk communication
Ambient temperature	0~40°C
Wireless LAN interface	IEEE802.11b/g/n
Video memory	Internal memory: 10 calls(max.) (10 seconds/call) SD card: 1,000 calls(max.) (10 seconds/call)
Protect video	Internal memory: 5 calls(max.) micro SDHC card: 100 calls(max.)
SD card	micro SDHC card: 4GB-32GB
Door release contact	24V AC/DC, 1A (N/O dry closure contact)
Option button output	24V AC/DC, 1A (N/O dry closure contact)
Mounting	Surface wall mount
Material	Unit case: Self-extinguishing PC + ABS resin Surface panel: Glass
Weight	Approx.620g

JO-1MD

Power source	18V DC, Supplied from a power supply
Power consumption	410mA(max.) 24mA(standby.)
Video monitor	7 inch TFT color LCD
Pixels	300,000 pixels (approx.)
Type of communication	Open voice hands-free auto-voice actuation or Press-to-talk communication
Ambient temperature	0~40°C
Door release contact	24V AC/DC, 0.5A (N/O dry closure contact)
Option button output	24V AC/DC, 0.5A (N/O dry closure contact)
Mounting	Surface wall mount
Electrical box	3-gang box
Material	Unit case: Self-extinguishing ABS resin Surface panel: Polycarbonate
Weight	Approx.470g

JO-1FD

Power source	18V DC, Supplied from a power supply
Power consumption	420mA(max.) 38mA(standby.)
Video monitor	7 inch TFT color LCD
Pixels	300,000 pixels (approx.)
Type of communication	Open voice hands-free auto-voice actuation or Press-to-talk communication
Ambient temperature	0~40°C
Door release contact	24V AC/DC, 0.5A (N/O dry closure contact)
Option button output	24V AC/DC, 0.5A (N/O dry closure contact)
Mounting	Surface wall mount
Electrical box	3-gang box
Material	Unit case: Self-extinguishing ABS resin Surface panel: Polycarbonate
Weight	Approx.480g

JO-DA

Power source	Supplied from Master monitor station or Expansion monitor station
Type of communication	Open voice hands-free communication
Camera	1/4 inch color CMOS
Ambient temperature	-20~+60°C
Mounting	Surface wall mount (Directly to wall or electrical box)
Electrical box	Single-gang box
Material	Self-extinguishing PC + ABS plastic
Weight	Approx.200g
IP rating	IP54 Protección a la Humedad y Polvo

JO-DV


Power source	Supplied from Master monitor station, Protección a la Humedad y Polvo
Type of communication	Open voice hands-free communication
Camera	1/4 inch color CMOS
Ambient temperature	-20~+60°C (-4~+140°F)
Mounting	Surface wall mount (Directly to wall or electrical box)
Electrical box	Single-gang box
Material	Front panel: Zinc die cast. Main unit: Self-extinguishing PC + ABS resin
Weight	Approx.650g
IP rating	IP54 protección a la humedad y polvo
IK rating	IK08 protección a impactos y golpes

JO-DVF


Power source	Supplied from Master monitor station or Expansion monitor station
Type of communication	Open voice hands-free communication
Camera	1/4 inch color CMOS
Ambient temperature	-20~+60°C
Mounting	Flush mount
Electrical box	Not used(Mounts on built-in back box)
Material	Front panel: Stainless steel. Main unit: Self-extinguishing PC + ABS resin
Weight	Approx.580g
IP rating	IP54 protección a la humedad y polvo
IK rating	IK07 protección a impactos y golpes

Dimensiones


JO-1MDW




JO-1MD, JO-1FD




JO-DA




JO-DV




JO-DVF




IER-2



PS-1820S, PS-1820UL



PS-1820BF, PS-1820*




Type of plug
PS-1820S PS-1820UL PS-1820BF


* AC cord & plug is not included with PS-1820.

Posición de montaje y área de visión.

[Vertically]



[Horizontally]



JO series

HANDS-FREE
VIDEO INTERCOM
7-INCH TOUCH SCREEN

Distributed by :



Deming Prize

Deming Medal



ISO 9001

JQA-0291
Corresponding product:
Standard product
Order product



ISO 14001

JQA-EM0453
HEADQUARTERS
TOYOTA FACTORY
TAIHOH SITE
DEVELOPMENT CENTER

 **AIPHONE®**
Providing Peace of Mind

<https://www.aiphone.ec/>

JO(E)1811A

All rights reserved. All statements valid at time of printing. The design and specifications are subject to change without notice for improvement.

Printed in Japan (E)
MB61066AHZ