


DESCRIPTION

The signal level meter allows simultaneous monitor of 16 channels per unit.
 Any of the high-impedance speaker line output, low-impedance speaker line output, and line level output can be monitored by connecting it to the corresponding input.
 One of the 16 channels can be monitored with an internal speaker or headphone.
 By connecting two MP-1216 units, a maximum of 32 channels can be monitored.


SPECIFICATIONS

Power Requirement	AC mains, 50/60 Hz
Power Consumption	21 W (120 V version) 25 W (220 - 240 V version)
Max. Display Level	Speaker High impedance: 100 V Low impedance: 1200 W / 8 Ω Line: +10 dB (2.45 V)
Level Meter	12-point display, -30 dB ~ +6 dB (0.3 W ~ 1200 W / 8 Ω)
Speaker Output	Max. 3 W
Headphone Output	8 Ω
Operating Temperature	0 °C to +40 °C
Finish	Front panel: Alumite, black
Dimensions	482.6 (W) × 88.4 (H) × 312.7 (D) mm (19" × 3.48" × 12.31")
Weight	5.3 kg (11.68 lb)
Accessory	AC fuse, 250 V 1 A (120 V version)···1, AC fuse, 250 V T250 mA (220 - 240 V version)···1, Rack mounting screw···4


APPEARANCE

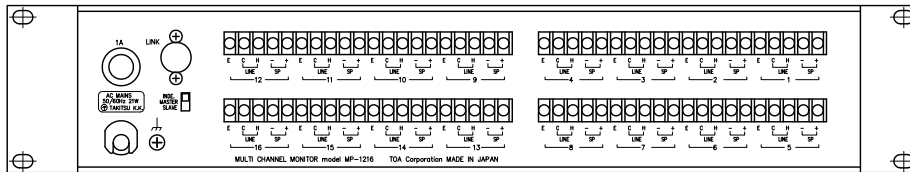

Rear View

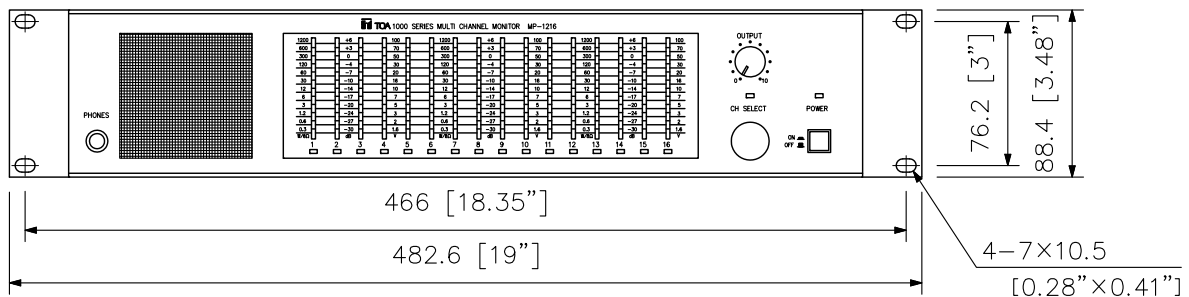

Front View

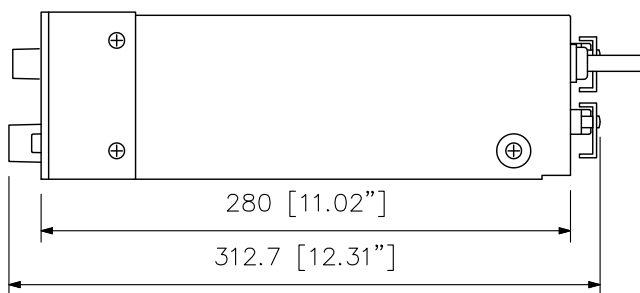

Side View

UNIT: mm SCALE: 1/4